

小封装

低正向电压

低成本

低漏电流


3G




照明




消费类电子



汽车



能源



工业

由代理商创意电子为您提供服务与技术支持

3G Schottky


Redefined Solution

3rd Generation Technology by Diotec

Power Saving

Rugged Design

State-of-the-Art Performance

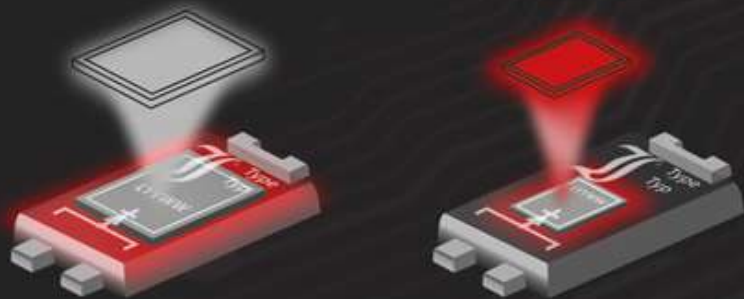

Standard Technology

3G Schottky Technology

Miniaturizing Chip Design

Smaller, Stronger, Smarter...

State-of-the-Art Performance

Typical Usage

Output Rectifier
Power Supplies
DC/DC Converter
Battery Charger
Polarity Protection

Free-Wheeling Diodes
LED Driver
OR-ing Diodes

Features/Benefits

Low Forward Voltage
Low Reverse Current
Low Power Losses
High ESD Robustness
Energy Savings

3G Schottky Diodes for Industrial Applications

Part Number	V _{RRM} [V]	I _{FAV} [A]	V _F [V]	@ I _F /T _j	V _F [V]	@ I _F /T _j	I _R [μA]	@ V _R /T _j	C _j [pF]	Package
SGL34-40*	40	0.5	0.40	0.5A/25°C	0.35	0.5A/100°C	10	40V/25°C	55	DO-213AA/MiniMelf
SGL1-40*	40	1	0.45	1A/25°C	0.40	1A/100°C	10	40V/25°C	55	DO-213AA/MiniMelf
SGL15-40*	40	1.5	0.50	1.5A/25°C	0.45	1.5A/100°C	10	40V/25°C	55	DO-213AA/MiniMelf
SMS140*	40	1	0.38	1A/25°C	0.32	1A/100°C	40	40V/25°C	120	DO-213AB/Melf
SMS240*	40	2	0.42	2A/25°C	0.37	2A/100°C	40	40V/25°C	120	DO-213AB/Melf
SMS340*	40	3	0.45	3A/25°C	0.40	3A/100°C	40	40V/25°C	120	DO-213AB/Melf
SL325MA-3G	20	3	0.43	3A/25°C	0.37	3A/100°C	15	20V/25°C	90	DO-214AC/SMA
SL345MA-3G	40	3	0.43	3A/25°C	0.37	3A/100°C	60	40V/25°C	90	DO-214AC/SMA
SK345MA-3G	40	3	0.48	3A/25°C	0.43	3A/100°C	30	40V/25°C	90	DO-214AC/SMA
SL52-3G	20	5	0.42	5A/25°C	0.37	5A/100°C	20	20V/25°C	90	DO-214AA/SMB
SL54-3G	40	5	0.42	5A/25°C	0.37	5A/100°C	150	40V/25°C	320	DO-214AA/SMB
SK54-3G	40	5	0.47	5A/25°C	0.42	5A/100°C	20	40V/25°C	340	DO-214AA/SMB
SL82-3G	20	8	0.47	5A/25°C	0.39	5A/100°C	20	20V/25°C	320	DO-214AB/SMC
SL84-3G	40	8	0.47	8A/25°C	0.39	8A/100°C	150	40V/25°C	320	DO-214AB/SMC
SK84-3G	40	8	0.51	8A/25°C	0.44	8A/100°C	30	40V/25°C	340	DO-214AB/SMC
PPS1045-3G	45	10	0.48	10A/25°C	0.42	10A/100°C	70	45V/25°C	510	TO-277B/PowerSMD
SK1045D2-3G	45	10	0.48	10A/25°C	0.42	10A/100°C	70	45V/25°C	510	TO-263AB/D ² PAK
SBT1040-3G	40	10	0.48	10A/25°C	0.42	10A/100°C	60	40V/25°C	510	TO-220AC
SBT1045-3G	45	10	0.48	10A/25°C	0.42	10A/100°C	70	45V/25°C	510	TO-220AC
PPS1545-3G	45	15	0.52	15A/25°C	0.43	15A/100°C	80	45V/25°C	720	TO-277B/PowerSMD
SK1545YD2-3G	45	15	0.52	15A/25°C	0.43	15A/100°C	80	45V/25°C	720	TO-263AB/D ² PAK
SK1845D2-3G	45	18	0.53	18A/25°C	0.44	18A/100°C	80	45V/25°C	720	TO-263AB/D ² PAK
SBT1840-3G	40	18	0.53	18A/25°C	0.44	18A/100°C	70	40V/25°C	720	TO-220AC
SBT1845-3G	45	18	0.53	18A/25°C	0.44	18A/100°C	80	45V/25°C	720	TO-220AC
SK2045YD2-3G	45	20	0.52	20A/25°C	0.43	20A/100°C	80	45V/25°C	720	TO-263AB/D ² PAK
SK2045CD2-3G	45	2x10	0.48	10A/25°C	0.42	10A/100°C	70	45V/25°C	510	TO-263AB/D ² PAK
SK2545YD2-3G	45	25	0.54	25A/25°C	0.49	25A/100°C	60	45V/25°C	800	TO-263AB/D ² PAK
SK3045CD2-3G	45	2x15	0.52	15A/25°C	0.43	15A/100°C	80	45V/25°C	720	TO-263AB/D ² PAK
SK4045CD2-3G	45	2x20	0.52	15A/25°C	0.43	15A/100°C	80	45V/25°C	720	TO-263AB/D ² PAK
SB1240-3G	40	12	0.49	12A/25°C	0.44	12A/100°C	60	40V/25°C	510	~DO-201
SB1540-3G	40	18	0.53	18A/25°C	0.44	15A/100°C	60	40V/25°C	720	D5.4x7.5
15SQ045-3G	45	15	0.52	15A/25°C	0.43	15A/100°C	80	45V/25°C	720	D5.4x7.5
SBX2040-3G	40	20	0.52	15A/25°C	0.43	20A/100°C	70	40V/25°C	720	D5.4x7.5 - Low Rth
20SQ045-3G	45	20	0.52	15A/25°C	0.43	20A/100°C	80	45V/25°C	720	D5.4x7.5
SBX2540-3G	40	25	0.54	25A/25°C	0.49	25A/100°C	70	40V/25°C	720	D5.4x7.5 - Low Rth
SBX3040-3G	40	30	0.54	30A/25°C	0.49	30A/100°C	50	40V/25°C	720	D5.4x7.5 - Low Rth

*coming 2Q 2019

产品咨询: www.weltronics.com

现货销售: www.welbuy.com



创意电子有限公司
Weltronics Component Limited

创意香港
电话: (852)24100623
传真: (852)24100920

创意深圳
(755)83480330
(755)83480105

创意广州
(020)83511853
(020)83511491

创意北京
(010)62982798
(010)62980880

创意上海
(021)60952881
(021)60952882

注: 查询其他办联系方式请登录公司网址