

白色家电


用于空调热交换器

ACH-18/40/42/45/60

ACH-18



ACH-40/42/45/60



ACH-18

- 电阻值..... $R_{25}=15k\Omega \pm 2\%$
- B值(3H) $B_{25/50}=3450K \pm 2\%$
 $B_{25/85}=3486K$
- 使用温度范围 $-30^{\circ}C \sim +100^{\circ}C$
- 热响应时间常数(水中) 5sec.

ACH-40/42/45/60

- 电阻值..... $R_{25}=10k\Omega \pm 3\%$
- B值(3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- 使用温度范围 $-30^{\circ}C \sim +100^{\circ}C$
- 热响应时间常数(水中) ACH-40,42 : 4.5sec.
ACH-45 : 5sec.
ACH-60 : 10sec.

■特点


- 防湿性能优异。
- 小型、温度响应快。

※关于R-T数据，请参阅本公司网站。
※有关热敏温度传感器的使用环境条件，请与本公司协商。


Home Appliance

For Heat Exchanger of Air conditioner

ACH-18



ACH-40/42/45/60

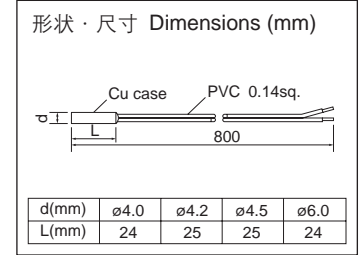

- Resistance $R_{25}=15k\Omega \pm 2\%$
- B value (3H) $B_{25/50}=3450K \pm 2\%$
 $B_{25/85}=3486K$
- Operating temperature range $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in water) 5sec.

- Resistance $R_{25}=10k\Omega \pm 3\%$
- B value (3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- Operating temperature range $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in water) ACH-40,42 : 4.5sec.
ACH-45 : 5sec.
ACH-60 : 10sec.

■Features

- Moisture resistant.
- Small with quick temperature response.

※Regarding R-T data, please refer to our web site.
※Please consult us regarding the operating conditions of Thermistor sensors.