
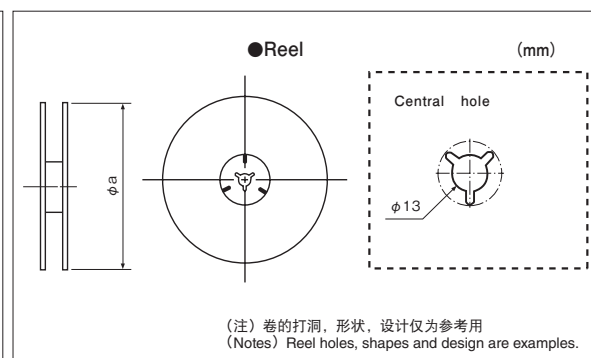


型号 Type	部件尺寸 Component Size (mm)			编带 型号 Carrier Tape	包装数量/卷 Qty/Reel (pcs)	重量 Weight (g)		编带 Taping (mm)					卷尺寸 Reel Size (mm) φa		
	L	W	T			卷 Reel	NET/ 1000pcs	A		W	P1	T1			
								B	T						
RCU	1.6	0.8	1.15	TE/TED	2,000/5,000	53/112	6.4	1.05±0.15	1.85±0.15	8	4	1.25±0.1	178/260		
RCT	2.0	1.25	1.45	TE/TED	2,000/5,000	70/153	13.9	1.65 ^{+0.1} _{-0.2}	2.45±0.15	8	4	1.70±0.1	178/260		
RCS	3.2	1.6	1.25	TE/TED	2,000/5,000	81/179	21.5	2.0±0.2	3.6±0.2	8	4	1.45±0.15	178/260		
RCW			2.0	TE	2,000	96	26.8	1.95 ^{+0.1} _{-0.05}	3.4 ^{+0.1} _{-0.05}	8	4	2.2±0.1	178		
CN CNN CN-A CN-K CN-N	1E2/1E2K/1E2KRT	1.0	0.35	TD	10,000	76	1.2	1.2±0.1	1.2±0.1	8	2	0.45±0.1	178		
	1E4	2.0	0.45	TD	10,000	97	3.1	1.27±0.1	2.27±0.1	8	2	0.7±0.1	178		
	1E4K/1E4KRT	2.0	0.35	TD	10,000	86	2.4	1.2±0.1	2.2±0.1	8	2	0.45±0.1	178		
	1J2/1J2K	1.6	0.6/0.5	TD	5,000	97	5.6/4.72	1.9±0.1	1.9±0.1	8	4	0.75 ^{+0.2} _{-0.2} /0.6 ^{+0.2} _{-0.2}	178		
	1J4.RT/1J4K.RT.A	3.2	0.6/0.5	TD	5,000	122	10.2/7.5	2.0±0.1	3.5±0.1	8	4	0.75 ^{+0.2} _{-0.2} /0.6 ^{+0.2} _{-0.2}	178		
	1F8K.RT/1F8N8K	3.8	0.5	TD	5,000	113	8.6	1.95±0.1	4.05±0.1	8	4	0.6 ^{+0.2} _{-0.2}	178		
	1J8	6.4	0.6	TE	4,000	174	21.3	2.0±0.2	6.9±0.2	12	4	0.9±0.1	178		
	2A2	2.54		TE	4,000	99	9.4	2.4±0.2	2.9±0.2	8	4	1±0.15	178		
	2A4/2A4RT	5.08		TE	4,000	175	20.6	2.3±0.2	5.4±0.2	12	4	1±0.15	178		
	2A8	10.16		TE	4,000	313	39.4	2.45±0.2	10.6±0.2	16	4	1±0.15	178		
	2B2	2.54	3.2	TE	4,000	92	17.6	3.0±0.2	3.5±0.2	8	4	1±0.15	178		
	2B4/2B4RT	5.08		TE	4,000	215	33.5	3.4±0.2	5.4±0.2	12	4	1±0.15	178		
	2B4A	5.10		3.1	0.55	TE	4,000	210	32.2	3.4±0.2	5.4±0.2	12	4	1±0.15	178
	2B8	10.16		3.2	0.6	TE	2,000	230	64.3	3.6±0.2	10.55±0.2	16	8	1±0.15	178
CND-K	1J10K	3.2	1.6	0.5	TD	5,000	122	8.5	2.0±0.1	3.5±0.1	8	4	0.6 ^{+0.2} _{-0.2}	178	
CND	2B10	6.4	3.1	0.6	TE	4,000	235	38.6	3.4±0.2	6.6±0.2	12	4	1±0.15	178	
	1J10Y	3.2	1.6	0.6	TD	5,000	122	10	2.0±0.1	3.5±0.1	8	4	0.75 ^{+0.2} _{-0.2}	178	
	2A10Y	4.0	2.1	0.6	TE	4,000	127	16	2.5±0.2	4.45±0.2	12	4	1±0.15	178	
CNB	2E5Z	3.2	2.5	0.6	TE	4,000	97	15.3	3.0±0.2	3.5±0.2	8	4	1±0.15	178	
	2B9Z	6.4	3.2		TE	4,000	260	38.6	3.5±0.2	6.7±0.2	12	4	1±0.15	178	
BR	27A	9.0	3.0	1.15	TEB	4,000	970	90	3.3±0.1	9.3±0.1	24	8	1.8±0.2	330	
	36S	9.0	4.0	1.15	TEB	4,000	1,090	120	4.3±0.1	9.3±0.1	24	8	1.8±0.2	330	
MRGF16	11	7.7	2.2	TE	2,000	1,100	280	8.2±0.2	11.7±0.2	24	12	2.4±0.1	330		
KPC	Q16	4.9	5.99	1.6	TE	2,500	580	76	6.5±0.1	5.3±0.1	12	8	2.1±0.1	330	
	Q20	8.66	5.99	1.6	TE	2,500	735	125	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330	
	Q24	8.66	5.99	1.6	TE	2,500	740	129	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330	
	N08	4.83	5.99	1.6	TE	2,500	575	73	6.5±0.1	5.3±0.1	12	8	2.1±0.1	330	
	N14	8.66	5.99	1.6	TE	2,500	790	150	6.5±0.1	9.0±0.1	16	8	2.1±0.1	330	
	N16	9.91	5.99	1.6	TE	2,500	800	153	6.5±0.1	10.3±0.1	16	8	2.1±0.1	330	
	S03	2.92	2.30	0.95	TE	3,000	110	9	3.15±0.1	2.77±0.1	8	4	1.22±0.1	180	
	LFC, KL	32	3.2	2.5	2.2	TE	2,000	143	50	2.7±0.1	3.55±0.1	8	4	2.7±0.15	178
KQC	0603	1.6	1.05	0.7	TE	2,000	52	5	1.20±0.05	1.77±0.05	8	4	0.86±0.05	178	
KQT,KQC	0402	1.0	0.5	0.55	TD	2,000	64	1	0.65±0.05	1.20±0.05	8	4	0.68±0.1	178	
				TP	10,000	123	1								
KQ	0603	1.6	1.0	0.9	TE	2,000	52	4	1.15±0.05	1.86±0.05	8	4	1.05±0.05	178	
	0805	2.0	1.5	1.3	TE	2,000	67	12	1.6±0.1	2.22±0.1	8	4	1.5±0.1	178	
	1008	2.5	2.2	1.8	TE	2,000	117	30	2.35±0.1	2.7±0.1	8	4	2.1±0.1	178	
LPC	4545	4.1	4.6	4.6	TE	2,500	815	230	4.85±0.2	4.25±0.2	12	8	5.1±0.2	380	
	4045	4.5	4.0	4.5	TE	2,500	800	210	4.75±0.2	4.15±0.2	12	8	5±0.2	380	
	4235	4.5	4.2	3.5	TM	2,000	680	165	4.4±0.2	4.75±0.2	12	8	4±0.2	330	
	9040N 9040E	9.0	10.2	4.9	TE	1,500	1,950	1,150	9.4±0.2		16	12	7.5±0.2	380	
	10065	10.4	10.0	7.5	TE	500	1,500	2,100	11.5±0.2	11±0.2	24	16	8.2±0.2	380	
	12065	12.4	12.0		TE	500	1,950	2,950	13±0.2	12.5±0.2	24	16	8.2±0.2	380	
LCM	1060	10.1	10.0	6.15	TEG	500	2,100	1,500	10.5±0.1	10.6±0.1	24 ^{+0.3} _{-0.1}	16±0.1	6.8±0.1	380	
LKS	0745	7.5	7.5	4.5	TEG	1,000	1,350	1,000	8.1±0.1	8.1±0.1	24±0.3	16±0.1	4.8±0.1	380	
	1045	10.1	10.1	4.5	TEG	1,000	1,900	1,534	10.7±0.1	10.7±0.1	24±0.3	16±0.1	4.8±0.1	380	
	1260	12.5	12.5	6.0	TEG	700	2,500	3,060	13.1±0.1	13.1±0.1	24±0.3	16±0.1	6.1±0.1	380	
KT	11835	11.8	3.6	3.0 max.	TEG	2,500	875	350	4.1±0.2	12.1±0.1	24±0.3	8	3.2±0.1	380	
NV73 NV73DL	1H	0.6	0.3	0.3	TBM	15,000	126	0.299	0.38±0.02	0.68±0.02	8	2	0.42±0.02	180	
	1E	1.0	0.5	0.5	TP	10,000	144	1.295	0.65±0.1	1.15±0.1	8	2	0.6 ^{+0.2} _{-0.2}	180	
	1J	1.6	2.8	0.8	TE	2,500	58	7	1.2±0.1	1.9±0.1	8	4	1.75 max.	178	
	2A	2.0	1.25	1.3 max.	TE	2,500	81	16	1.6±0.1	2.4±0.1	8	4	1.75 max.	178	
	2B	3.2	1.6	1.65 max.	TE	2,500	114	32	2.0±0.1	3.6±0.1	8	4	1.75 max.	178	
	2E	3.2	2.5	1.5 max.	TE	2,000	138	56	2.85±0.1	3.50±0.1	8	4	1.55 max.	178	
	2J	4.5	3.2	2.0 max.	TE	1,000	190	134	3.60±0.1	4.90±0.1	12	8	2.05 max.	180	
	2L	5.7	5.0	2.5 max.	TE	1,000	460	440	5.40±0.1	6.00±0.1	12	8	2.60 max.	180	
NV73DS	2L	6.1	5.1	3.7 max.	TE	500	350	550	5.30±0.1	6.6±0.1	12	8	3.70 max.	180	
TF	10B	1.0	0.5	0.45	TB	10,000	95	0.68	0.65±0.05	1.15±0.05	8	2	0.6±0.04	180	
	16S,16A,16VN	1.6	0.8	0.4	TD	5,000	105	2.14	1.1±0.1	1.9±0.1	8	4	0.6 ^{+0.2} _{-0.2}	180	
CCP	2B	3.2	1.6	1.2	TE	3,000	60	13	1.9±0.1	3.5±0.1	8	4	1.5±0.1	180	
	2E		2.5	2.2	TE	2,000	100	38.6	2.8±0.1	3.5±0.1	8	4	2.4±0.1	180	
CCF	1N, 1F	6.0	2.5	2.5	TE	1,000	210	140	2.7±0.2	6.4±0.2	12	4	2.9±0.2	180	

包装规格 Packaging specifications

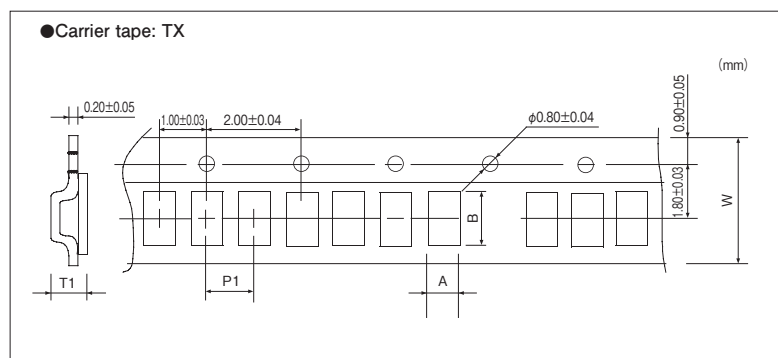

包装规格