


Plastic Mold Infrared LEDs KED941M31A

Features

- Transparent epoxy mold
- Direct modulation

Applications

- Optical switches
- Optical encoders
- Optical instruments
- Automatic control apparatus

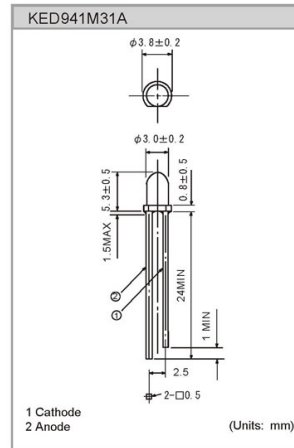

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Conditions
Forward current	I_F	100	mA	
Peak forward current	I_{FP}	1	A	Puls width=100 μ s, Duty ratio=1%
Reverse voltage	V_R	6	V	
Power dissipation	P_D	150	mW	
Operating temperature	T_{opr}	-30 to +85		Avoid dew condensation
Storage temperature	T_{stg}	-30 to +100		Avoid dew condensation
Soldering temperature	T_{sol}	260		Soldering time less than 5 seconds

Electrical and Optical characteristics

Parameter	Symbol	Value			Unit	Conditions
		Min.	Typ.	Max		
Forward voltage	V_F		1.3	1.6	V	$I_F=50$ mA
Reverse Current	I_R			10	μ A	$V_R=6$ V
Optical output power	P_O		11		mW	$I_F=50$ mA
Peak wavelength	ρ		940		nm	$I_F=50$ mA
Spectral width			50		nm	$I_F=50$ mA
Half angle	2		36		deg	$I_F=50$ mA

