

NX2520SG

For Automotive

■ Features

Crystal Unit with built-in Thermistor construction for automotive.

- Placing temperature sensor(Thermistor) close to Crystal blank in one airtight housing can detect more precise crystal blank temperature. Improvement on frequency temperature compensation compared to present Crystal unit.
- It is ideal for applications such as vehicle communication equipment and car navigation systems.
- Meets the requirements for re-flow profiling using lead-free solder.
- Conforms to AEC-Q200.



Pb Free

RoHS Compliant
Directive 2011/65/EU

■ Specifications


| Item | Model | NX2520SG |
|----------------------------------------------------------------------------|-------|-------------------------------|
| Nominal Frequency | | 16 to 80 MHz |
| Overtone Order | | Fundamental |
| Frequency Tolerance (25°C) | | $\pm 10 \times 10^{-6}$ |
| Frequency versus Temperature Characteristics (with reference to +25 °C) *1 | | $\pm 25 \times 10^{-6}$ |
| Operating Temperature Range | | -40 to +105 °C |
| Storage Temperature Range | | -40 to +105 °C |
| Equivalent Series Resistance | | Refer to *2 |
| Level of Drive | | 10 μ W (Max. 100 μ W) |
| Load Capacitance | | 7 pF |

*1: In the case of 19.2M is with reference to +30°C.

NTC Thermistor for Temperature Sensor

| | |
|---------------------|------------------------|
| Resistance [R25] | 100k $\Omega \pm 1 \%$ |
| B-Constant [B25-50] | 4250K $\pm 1 \%$ |

■ Dimensions

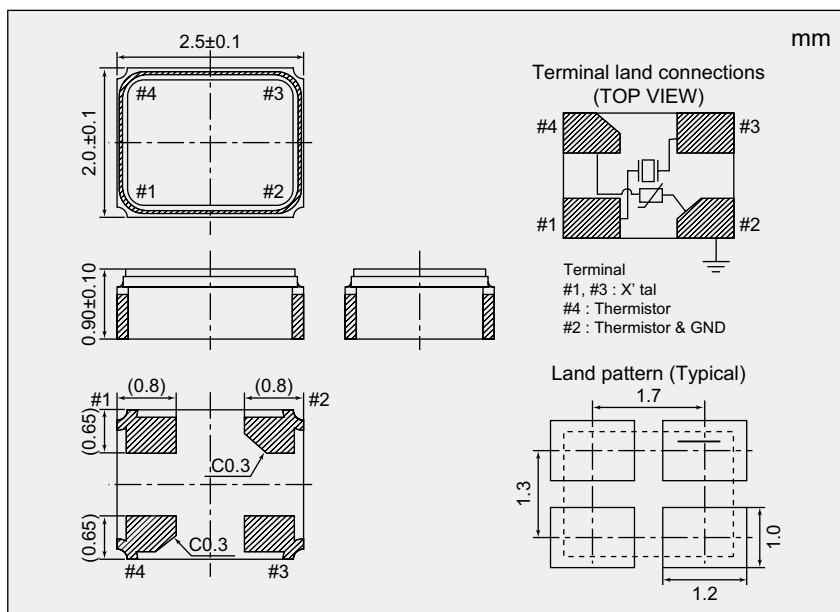

*1 Equivalent Series Resistance

| Nominal frequency (MHz) | Equivalent Series Resistance max. [Ω] |
|-------------------------|------------------------------------------------|
| 16 to 19.2 | 120 |
| 19.2 to 20 | 80 |
| 20 to 40 | 50 |
| 40 to 80 | 40 |

If you require this product, please contact NDK sales.