

NT2520SE

Temperature Compensated Crystal Oscillator(TCXO)
with wide temperature range for high-precision GPS

■ Main Application

Automotive communication(e.g., Automotive navigation or Telematics), Wireless module, and GPS / GNSS module, etc.

■ Features

- Supports $\pm 0.5 \times 10^{-6}$ / -40 to +105°C
- A crystal oscillator with highly stable frequency / temperature characteristics best suited for GPS.
- Compact and light with a height, cubic volume, and weight of Max. 0.9 mm, 0.004 cm³, and 0.014 g, respectively.
- Supports low power supply voltage. (Supports DC +1.7 V to +3.3 V.)
- Low power consumption.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- Conforms to AEC-Q100/200.
- Products with the AFC (Automatic Frequency Control) function is available.



Pb Free

RoHS Compliant
Directive 2011/65/EU


■ Specifications

Item	Model							NT2520SE						
Nominal Frequency Range (MHz)	10 to 52													
Standard Frequency (MHz)	16.368	16.369	19.2	26	33.6	38.4	52							
Supply Voltage [V _{cc}] (V)	+1.8													
Load Impedance	10 kΩ//10 pF													
Current Consumption (mA)	Max. 1.5				Max. 1.7			Max. 2.0						
Output Voltage	Min. 0.8 V(p-p) (DC Coupling *1)													
Frequency/Temperature Characteristics	Max. $\pm 0.5 \times 10^{-6}$													
Operating Temperature Range (°C)	-40 to +105													
Storage Temperature Range (°C)	-40 to +105													
Frequency/Voltage Coefficient	Max. $\pm 0.1 \times 10^{-6} / +1.8 \text{ V} \pm 5 \%$													
Frequency/Load Coefficient	Max. $\pm 0.1 \times 10^{-6} / (10 \text{ k}\Omega // 10 \text{ pF}) \pm 10 \%$													
Long-term Frequency Stability	Max. $\pm 1.0 \times 10^{-6} / \text{year}$													
Specification Number	NSC5073A	NSC5073A	NSC5073A	NSC5073B	NSC5073B	NSC5073B	NSC5073C	NSC5073C	NSC5073D					

• Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C)

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

■ Dimensions

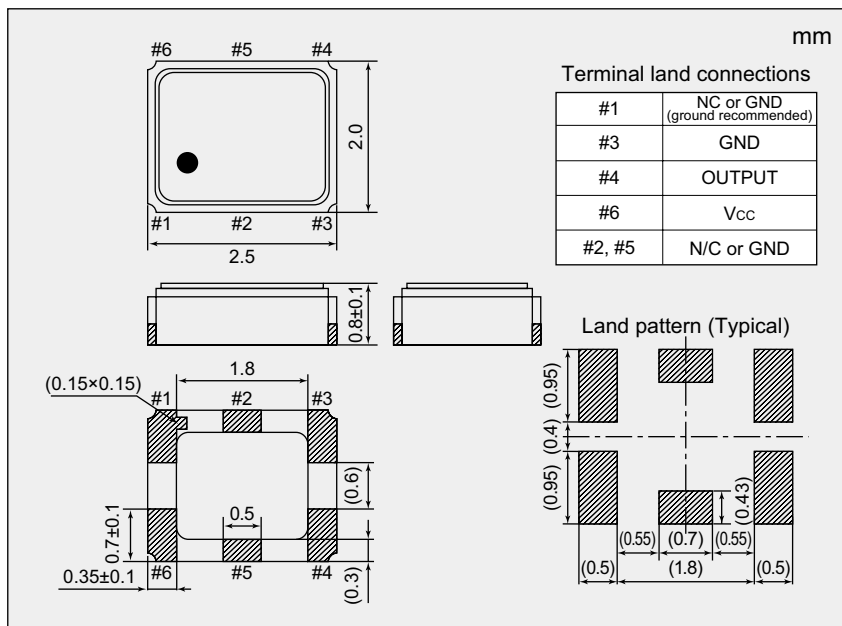

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.