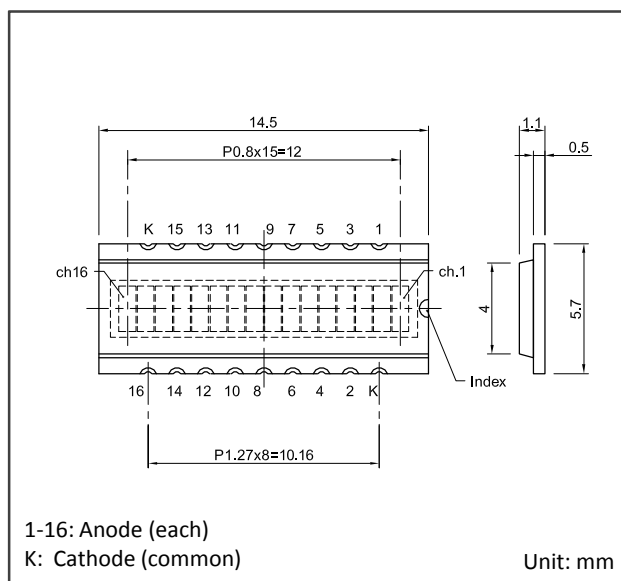


Features

- 16 channel array
- Transparent epoxy mold
- SMD package

Applications

- Optical switches
- Optical encoders
- Pulse detectors
- Sensors and industrial controls


**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unite	Note
Reverse voltage	V_R	15	V	
Reverse current	I_R	500	μA	
Forward current	I_F	10	mA	
Operating temperature	T_{opr}	-20 to +80	$^{\circ}C$	Avoid dew condensation
Storage temperature	T_{stg}	-20 to +100	$^{\circ}C$	Avoid dew condensation


Electrical and Optical Characteristics ($T_a=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unite	Test Condition
Active area	S	0.74 x 2.0			mm^2	Each element
Sensitive wavelength	λ	400	900(λ_p)	1100	nm	λ_p =Peak wavelength
Responsivity	R	-	0.54	-	A/W	$\lambda=850nm$
Dark current	I_D	-	-	1	nA	$V_R=5V$
Terminal capacitance	C_t	-	30	-	pF	$V_R=0V, f=1MHz$
Crosstalk	X	-	-	-10	dB	$\lambda=850nm, 20\mu m$ dia.


Dark Current - Reverse Voltage

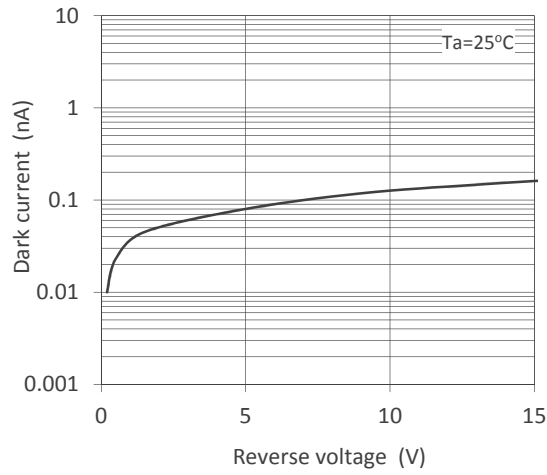


Capacitance - Reverse Voltage

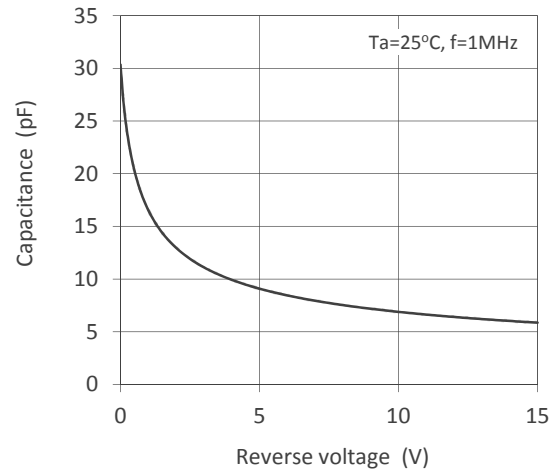

Spectral Responsivity

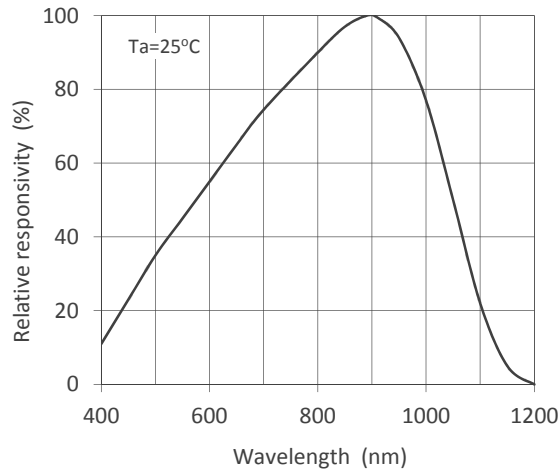

Crosstalk

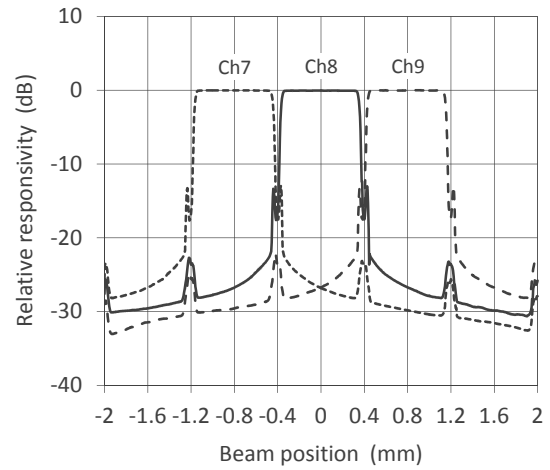

- Specifications , characteristics, data, materials, structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.
- Products listed in this datasheet comply with the RoHS Directive (EU2002/95/EC).

Opto-technologies for the Future



KYOSEMI CORPORATION

<http://www.kyosemi.co.jp/>

Headquarters : 949-2 Ebisucho Fushimi-ku, Kyoto 612-8201 Japan

TEL: +81-75-605-7311

Tokyo Sales Office: 24th Sky Bldg.2F, 1-34-3 Shinjuku Shinjuku-ku, Tokyo 160-0022 Japan

TEL: +81-3-5312-5360

Kansai Sales Office: 949-2 Ebisucho Fushimi-ku, Kyoto 612-8201 Japan

TEL: +81-75-605-7311

Kyosemi Opto America Corp: 4655 Old Ironsides Suite 230 Santa Clara, California 95054 USA

TEL: +1-408-492-9361

Eniwa Operation: 385-31 Toiso Eniwa-shi, Hokkaido 061-1405 Japan

TEL: +81-123-34-3111

Kamisunagawa Operation: 70-1 Kamisunagawa Kamisunagawa-cho Sorachi-gun, Hokkaido 073-0200 Japan

TEL: +81-125-62-3611