

Crystal Oscillator

NT2016SB


Temperature Compensated Crystal Oscillator(TCXO)
with Enable/Disable (Stand-by) Function

Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

Features

- Supports low power supply voltage. (Supports DC +1.7 V to +3.3 V.)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.8 mm, 0.0022 cm³, and 0.008 g, respectively.
- With an Enable/Disable (Stand-by) function.
- Low power consumption.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.

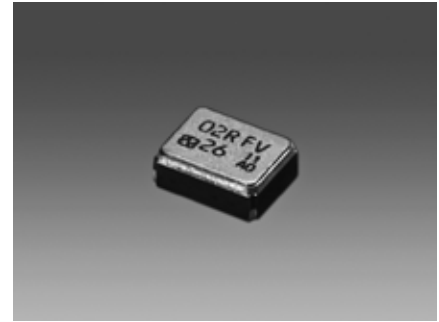

Pb Free

RoHS Compliant
Directive 2011/65/EU


Specifications

Item	Model	NT2016SB						
Nominal Frequency (MHz)		10 to 52						
Standard Frequency (MHz)		16.368	16.369	19.2	26	33.6	38.4	52
Supply Voltage [V _{CC}] (V)		+1.8						
Load Impedance		10 kΩ/10 pF						
Current Consumption	Enable (mA)	Max. 1.5				Max. 1.7	Max. 2.0	
	Disable (μA)	Max. 2						
Output Voltage		Min. 0.8 V(p-p) (DC Coupling *1)						
Frequency/Temperature Characteristics		Max. ±2.0×10 ⁻⁶						
Operating Temperature Range (°C)		-30 to +85						
Storage Temperature Range (°C)		-40 to +85						
Frequency/Voltage Coefficient		Max. ±0.1×10 ⁻⁶ /+1.8 V±5 %						
Frequency/Load Coefficient		Max. ±0.1×10 ⁻⁶ /(10 kΩ/10 pF) ±10 %						
Long-term Frequency Stability		Max. ±1.0×10 ⁻⁶ /year						
Enable/Disable Function		Enable : 80%V _{CC} to V _{CC} , Disable : 0V to 20%V _{CC}						
Specification Number		NSA3560A	NSA3560A	NSA3560A	NSA3560B	NSA3560B	NSA3560C	NSA3560D

* Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

Dimensions

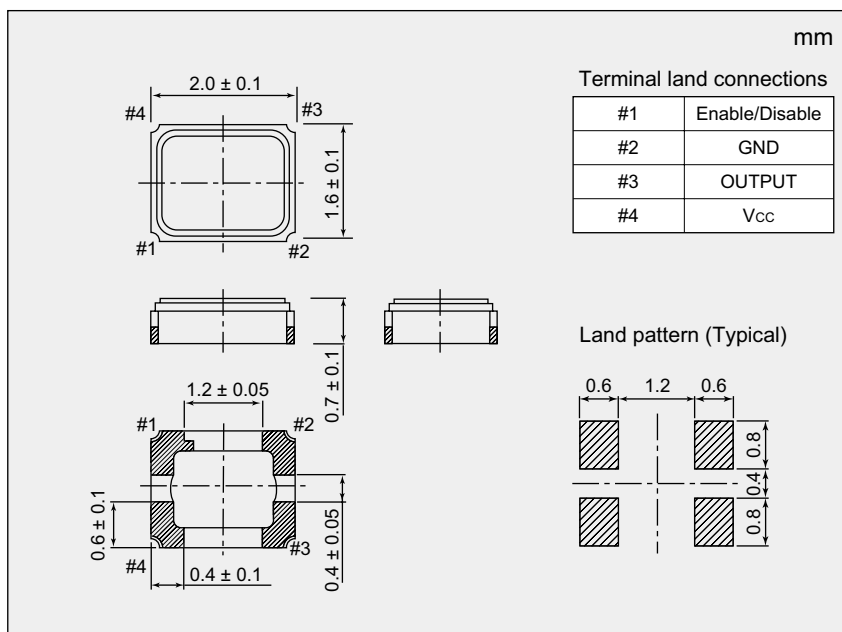

Please specify the model name, frequency, and specification number when you order products.
For further questions regarding specifications, please feel free to contact us.