

汽车

用于ECU

[径向导线型]

BN35




※BN35系列中也有  
(氯、溴分别在900ppm以内，卤素total1500ppm以内)  
的产品，请与本公司协商。

Automotive products

For ECU

[Radial Leaded Type]

BN35

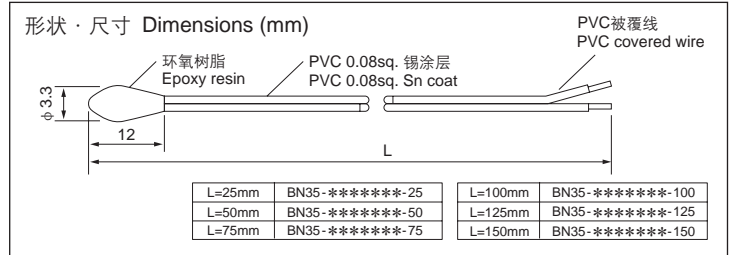

※For BN35 series, they are low - halogen products  
(Specification: Cl, Br each 900ppm or less., halogen total 1,500ppm or less.).  
Please approach us for details.

特性 Characteristics

BN35 系列 BN35Series

系列名 Series	型号 (type)	使用温度范围 Temperature range	电阻值容许偏差 (%) R25 Resistance tolerance at 25°C			B值容许偏差 B25/50 (%) B value tolerance	电阻值 R25 resistance	B值 B25/50 B value	B值 B25/85 B value	最大功率 (mW) Maximum power dissipation	散热系数 (mW/°C) Heat dissipation	热响应时间常数 (S) Thermal time constant
			±1	±2	±3							
BN35	3H103 **	-20~+80°C	±1	±2	±3	±1	10kΩ	3,450K	3,486K	132	2.4	40
	3T103 **		±1	±2	±3	±1	10kΩ	3,950K	3,989K			
	3U104 **		±1	±2	±3	±1	100kΩ	3,950K	4,024K			
	5B225 **		-	-	±3	±3	2.2MΩ	5,200K	5,290K			

※ BN35 系列中也有通过 UL1434 标准的产品。  
※ 关于 R-T 数据，请参阅本公司网站。

※ It is available in a UL1434 approved type for BN35 series.  
※ Regarding R-T data, please refer to our web site.