
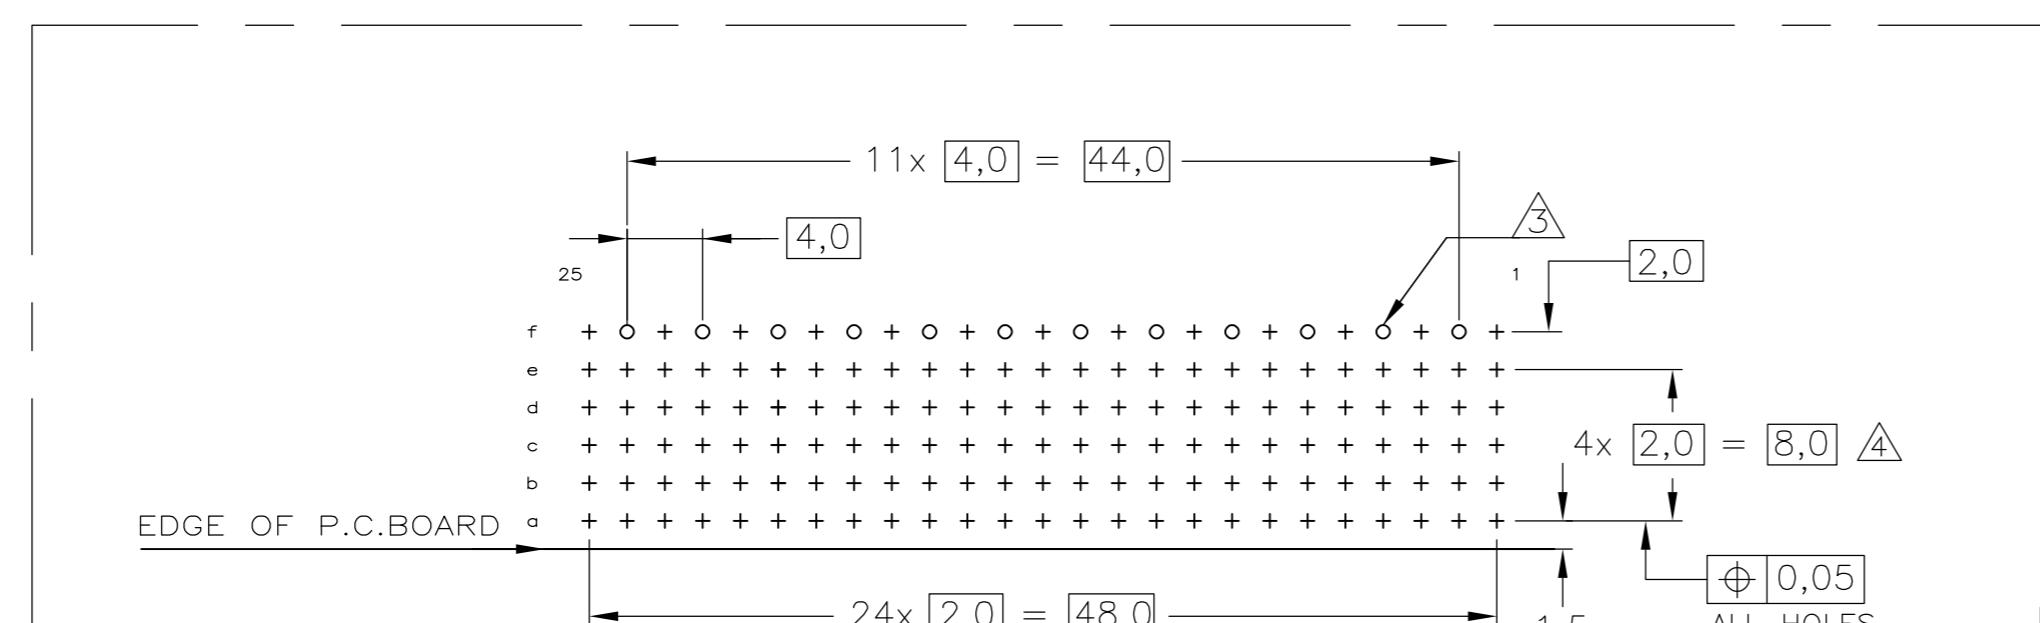
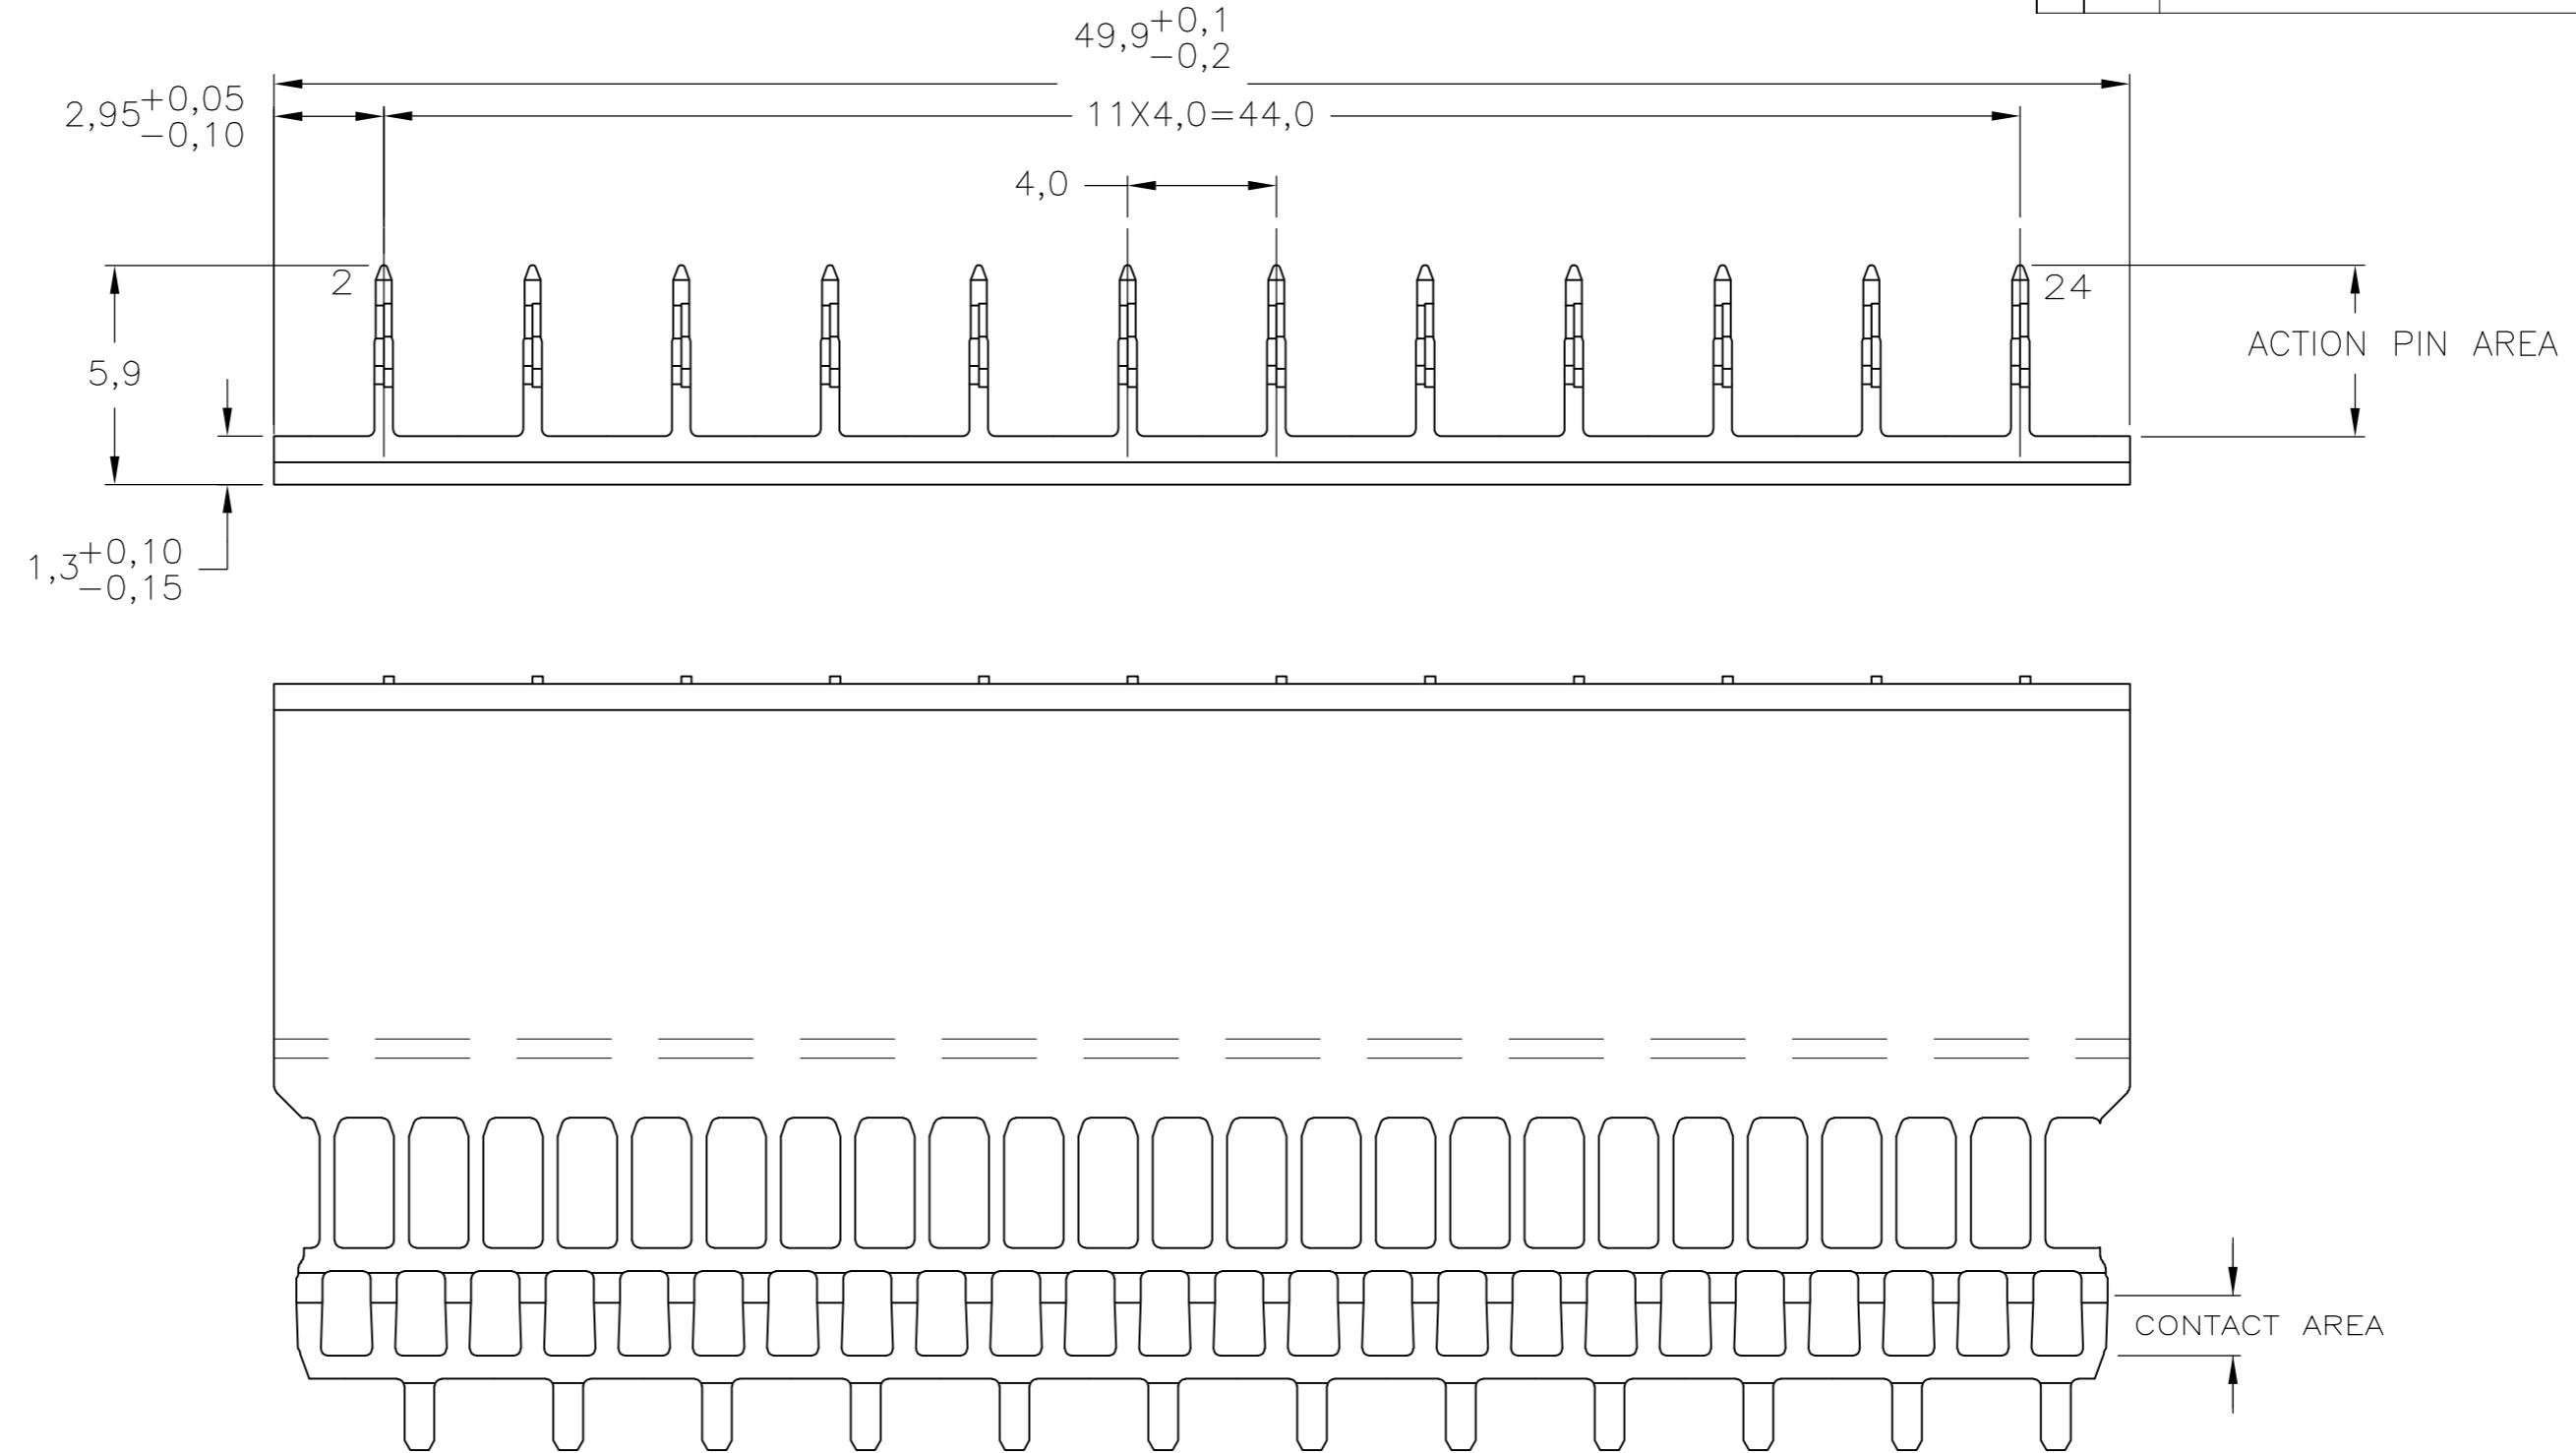


THIS DRAWING IS UNPUBLISHED.  
 RELEASED FOR PUBLICATION  
 - - -  
 © COPYRIGHT - By -  
 ALL RIGHTS RESERVED.

REVISIONS  
 LOC H DIST —  
 P LTR J  
 DESCRIPTION REVISED PER ECO-13-015151  
 DATE 17DEC2013 DWN APVD

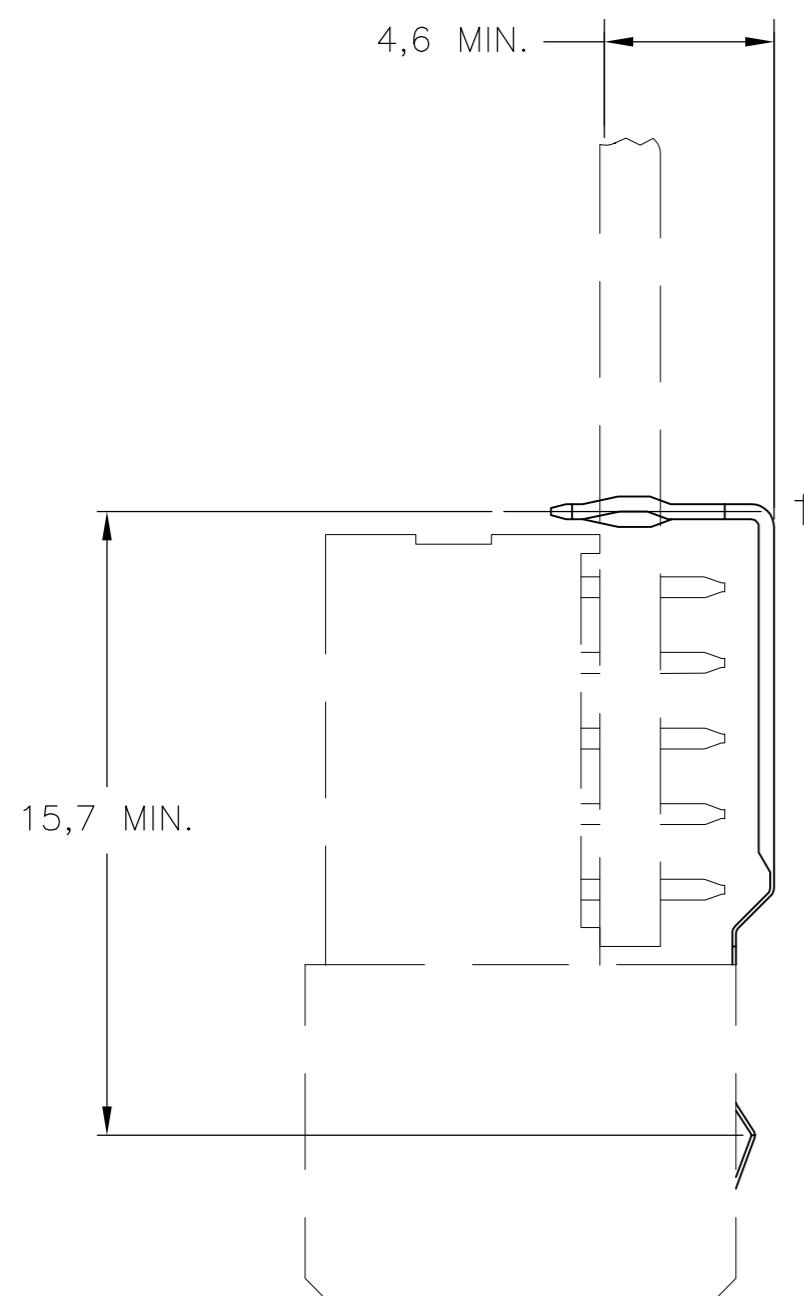

COMPONENT SIDE AS SHOWN  
 RECOMMENDED PCB-HOLE LAY-OUT

NOTES:

- ▲ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- ▲ MATERIAL: PHOSPHORBRONZE.
- ▲ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- ▲ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS WITH UPPERSHIELD, 125+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. MAX. BOARD THICKNESS 3,5 mm.
- ▲ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- ▲ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ▲ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- ▲ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ▲ 0.76µm MIN GOLD PLATING AT MATING SURFACE.

OBSOLETE	▲▲▲	▲	4-338110-0
	▲▲▲	▲	338110-9
	▲▲	▲	338110-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN 27-11-96 D. TRUREN CHK 27-11-96 W. v.d.HEIJDEN APVD F. v.KONINGSBRUGGE	NAME  Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE B-25 COLUMNS
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0-PLC	1-PLC	±0,2	PRODUCT SPEC 108-19082
2-PLC	3-PLC	±0,2	APPLICATION SPEC 114-19029
4-PLC	ANGLES	±—	MATERIAL -
			WEIGHT —
			CUSTOMER DRAWING
			SCALE 5:1 SHEET 1 OF 1 REV J
			A2 00779 C-338110