
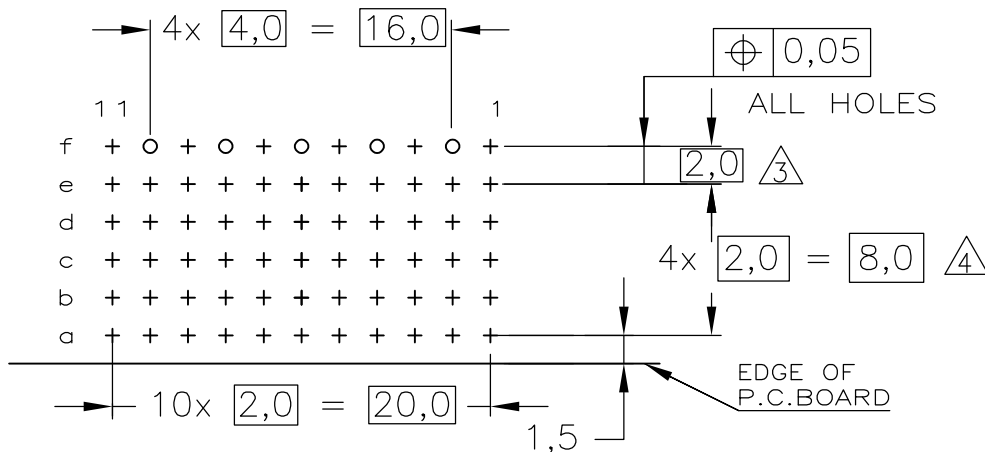
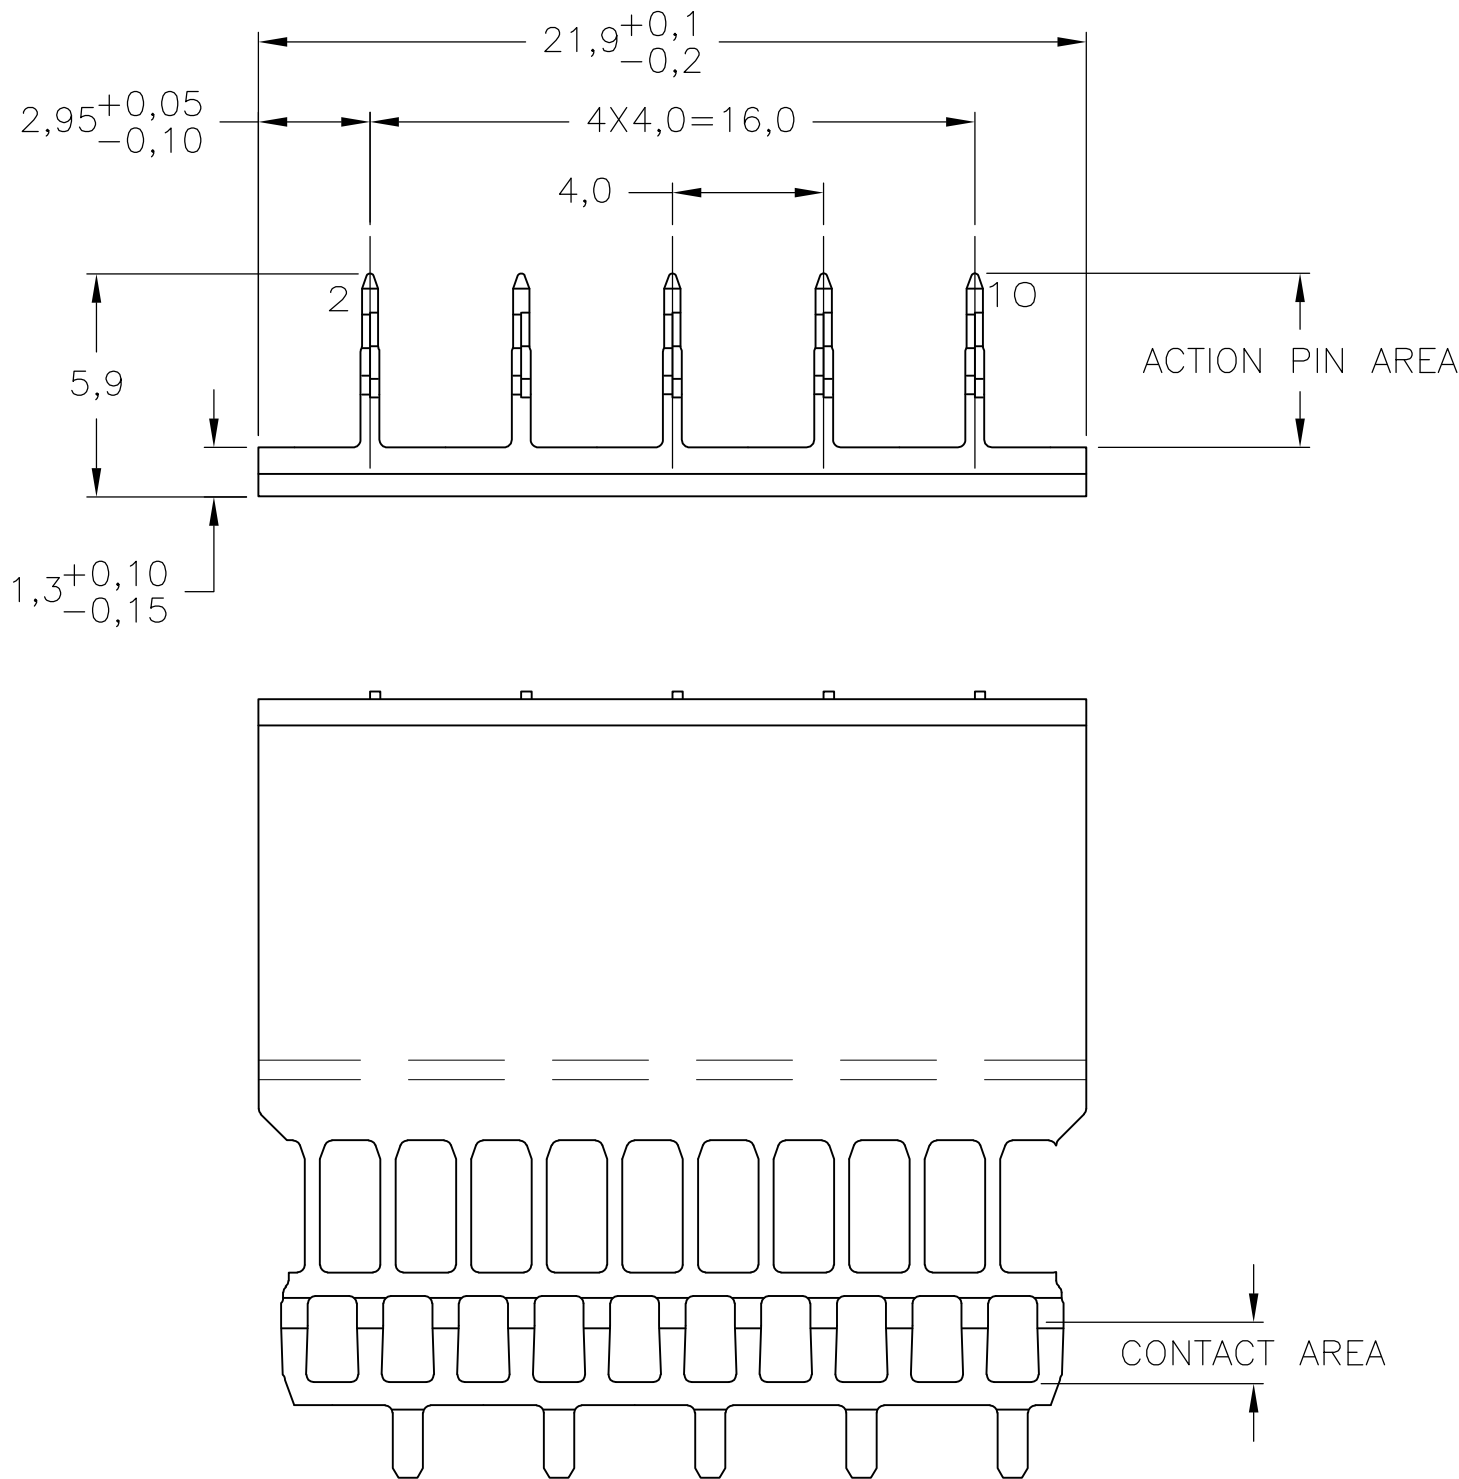


D

C

B

A

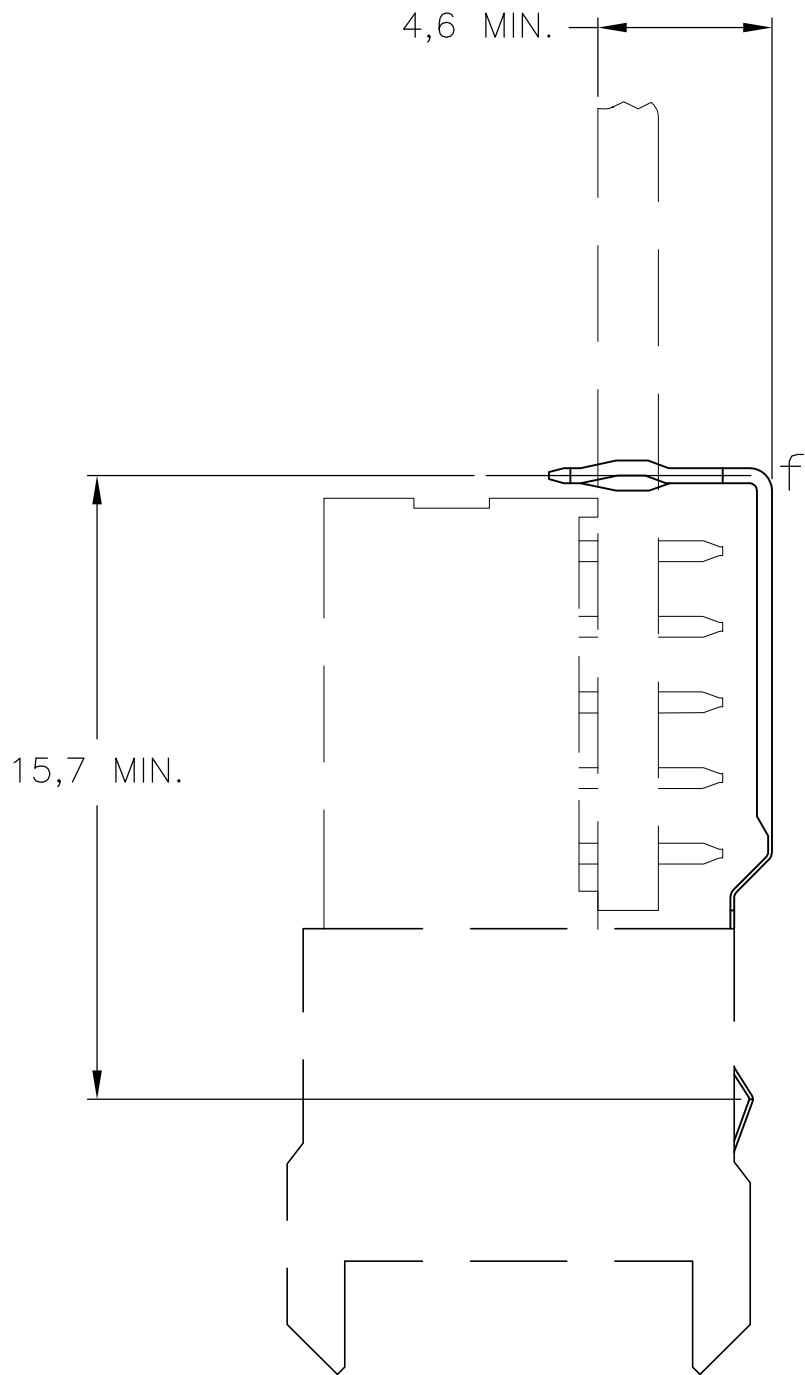


COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

NOTES:

- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- MATERIAL; PHOSPHORBRONZE.
- ROW "f" 5 PLATED THROUGH HOLES FOR LOWERSHIELD.
- HOLE PATTERN FOR FEMALE CONNECTOR TYPE C WITH UPPERSHIELD, 55+6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- MAX. BOARD THICKNESS 3,5 mm.
- SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
- 0.76µm MIN GOLD PLATING AT MATING SURFACE.

1210	2	4-5352112-0
169	2	5352112-9
12	2	5352112-2
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 18AUG04		TE Connectivity			
DIMENSIONS: mm		CHK B.MOOIJ 25MAR05					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME				
	0-PLC ± — ±0.2		Z-PACK 2mm HM				
	1-PLC ± —		GROUND RETURN LOWER SHIELD				
	2-PLC ± —		TYPE C/M				
	3-PLC ± —						
MATERIAL —	4-PLC ± —		SIZE				
	ANGLES ± —		CAGE CODE				
	FINISH		DRAWING NO				
			RESTRICTED TO				
			—				
		WEIGHT —		A2 00779			
		CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV D