


DSAZR

■特点

- 可在各种电源电路中使用。
- 可用于电视机天线输入电路的防浪涌。
- 部分型号已获得UL、CSA、TÜV认证。

■型号构成 Part number system

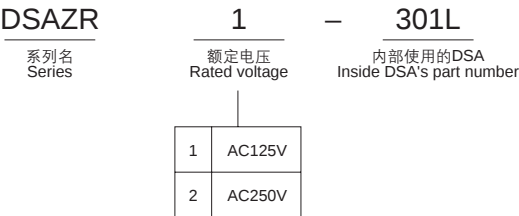


DSAZR

■Features

- Used to protect power supplies.
- Excellent for protecting TV-tuner circuits.
- Some models are recognized by UL, CSA and TÜV.



■形状尺寸 Dimensions

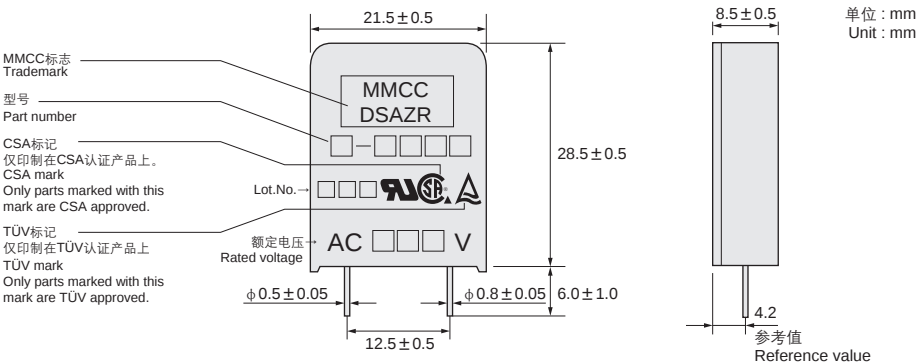

■特性 Characteristics

额定电压 Rated voltage	型号 Part number	直流放电开始电压 DC spark-over voltage Vs	绝缘阻抗 Insulation resistance IR		静电容量 Electrostatic capacitance 1kHz-6V max. C	浪涌耐量 Surge current capacity 8/20μsec.	浪涌寿命 Surge life test.	AC耐电压 Withstanding voltage	UL规格认证产品 UL recognized	CSA认证 CSA approved	EN认证 EN approved
									1) UL1449	2) C22.2No.1	3) EN60065 EN60950-1
AC125V	DSAZR1-301L	500V(400～600)	100MΩmin.	DC100V	2pF max.	1000A	8/20μsec. 100A 300 times	—	○	—	—
	DSAZR1-501M	600V(480～720)		DC250V				—	○	—	—
	DSAZR1-102M	1,100V(880～1,320)		DC500V				—	—	—	—
	DSAZR1-242M	2,400V(1,920～2,880)						AC1,000V-1min. AC1,200V-3sec.	○	○	—
	DSAZR1-282M	2,800V(2,240～3,360)						AC1,250V-3sec.	—	○	—
	DSAZR1-302M	3,000V(2,400～3,600)						AC1,500V-1min.	○	○	—
	DSAZR1-362M	3,600V(2,880～4,320)						AC1,800V-3sec.	○	○	—
	DSAZR1-402M	4,000V(3,200～4,800)						AC2,000V-1min.	○	○	—
	DSAZR1-452M	4,500V(3,600～5,400)		DC1000V				AC2,000V-1min.	○	○	—
AC250V	DSAZR2-501M	800V(640～960)	100MΩmin.	DC250V	2pF max.	1000A	8/20μsec. 100A 300 times	—	○	—	—
	DSAZR2-102M	1,400V(1,120～1,680)		DC500V				—	—	—	—
	DSAZR2-242M	2,400V(1,920～2,880)						AC1,000V-1min. AC1,200V-3sec.	○	—	—
	DSAZR2-302M	3,000V(2,400～3,600)						AC1,500V-1min.	○	○	○
	DSAZR2-362M	3,600V(2,880～4,320)						AC1,800V-3sec.	○	○	○
	DSAZR2-402M	4,000V(3,200～4,800)						AC2,000V-1min.	○	○	○
	DSAZR2-452M	4,500V(3,600～5,400)		DC1000V				AC2,000V-1min.	○	○	○

1): UL Standard UL 1449 File No. E318314
2): CSA Standard C22.2 No. 1 File No. CA87070
3): TÜV Report No. J9251508