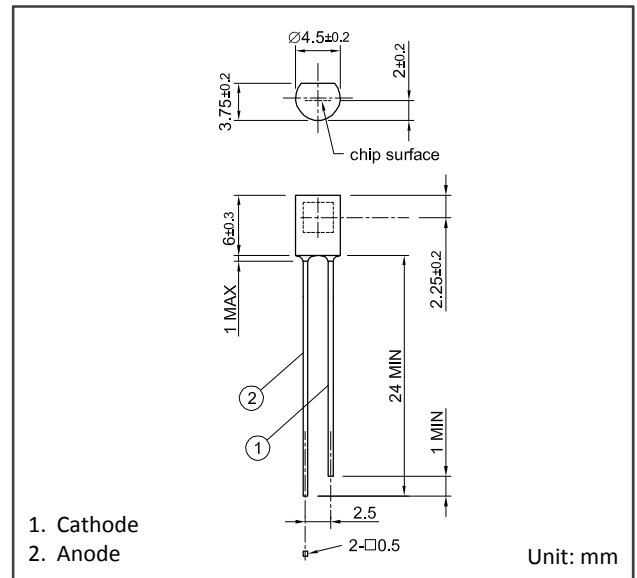


**Features**

- Transparent epoxy mold
- High sensitivity

**Applications**

- Optical switches
- Pulse detectors
- Sensors and industrial controls


**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit	Note
Reverse voltage	$V_R$	5	V	
Reverse current	$I_R$	1	mA	
Forward current	$I_F$	10	mA	
Operating temperature	$T_{opr}$	-25 to +80	°C	Avoid dew condensation
Storage temperature	$T_{stg}$	-25 to +100	°C	Avoid dew condensation


**Electrical and Optical Characteristics** ( $T_a=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Active area	S	2.59 x 2.59			mm <sup>2</sup>	
Sensitive wavelength	$\lambda$	400	950( $\lambda_p$ )	1100	nm	$\lambda_p$ =Peak wavelength
Short circuit current	$I_{sh}$	-	78	-	$\mu\text{A}$	1000lx @2856K
Dark current	$I_D$	-	-	30	nA	$V_R=5\text{V}$
Terminal capacitance	$C_t$	-	17	-	pF	$V_R=5\text{V}$ , f=1MHz
Half angle	$2\theta$	-	150	-	deg.	


Dark Current - Reverse Voltage

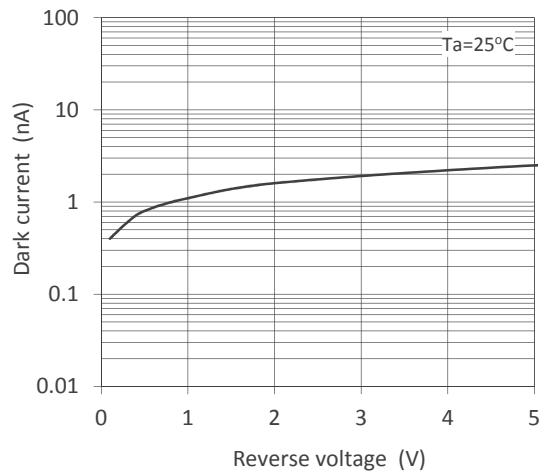


Photocurrent - Ambient Temperature

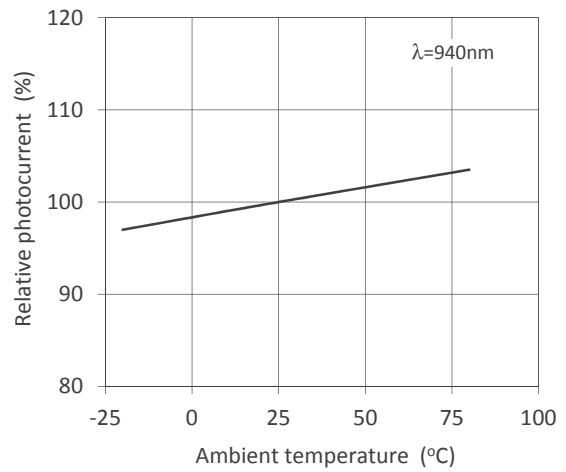


Photocurrent - Illuminance

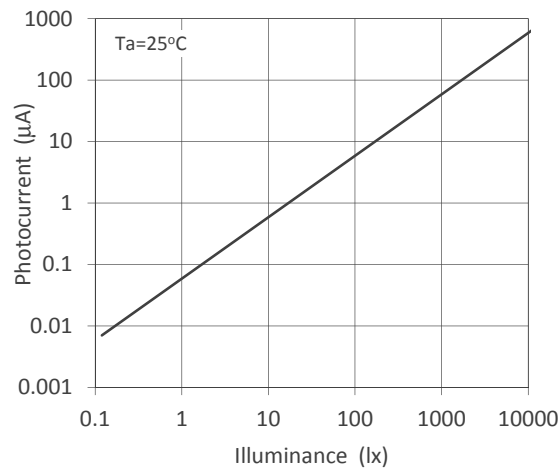


Dark Current - Ambient Temperature

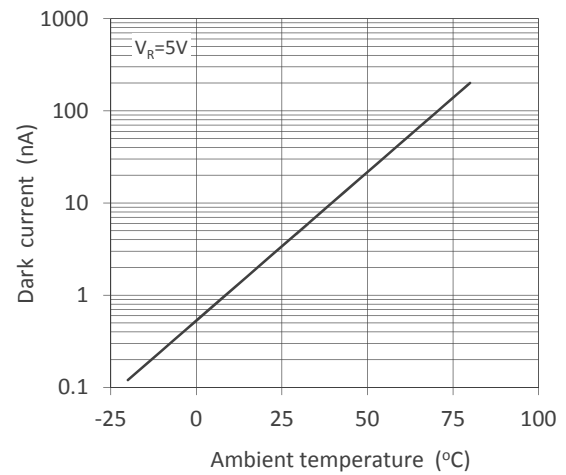

Spectral Responsivity

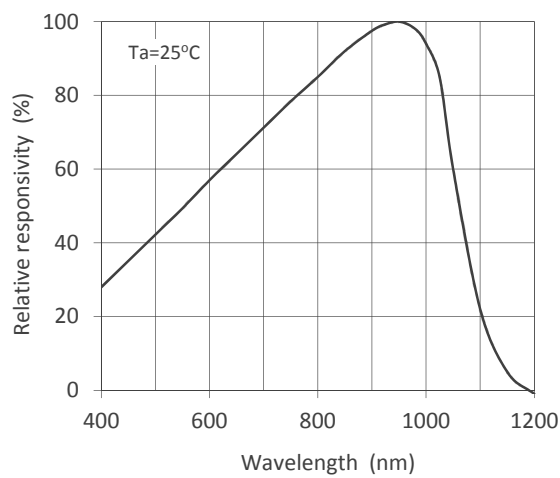

Directivity

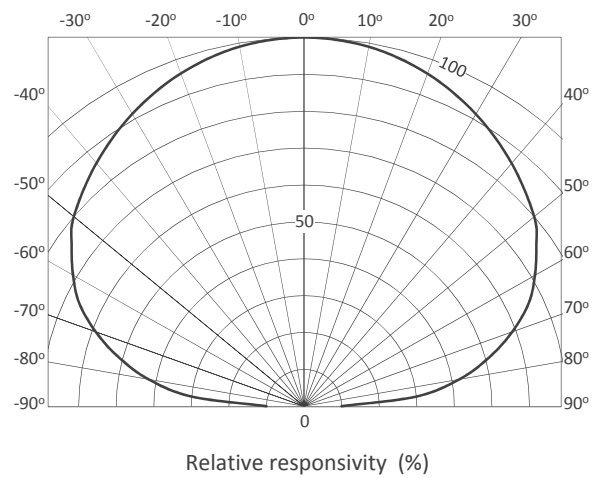

- Specifications , characteristics, data, materials, structures specified in this datasheet are subject to change without notice. Please refer to the latest specification before use of the products.
- Products listed in this datasheet comply with the RoHS Directive (EU2002/95/EC).

**Opto-technologies for the Future**



---

## KYOSEMI CORPORATION

<http://www.kyosemi.co.jp/>

**Headquarters :** 949-2 Ebisucho Fushimi-ku, Kyoto 612-8201 Japan

TEL: +81-75-605-7311

**Tokyo Sales Office:** 24<sup>th</sup> Sky Bldg.2F, 1-34-3 Shinjuku Shinjuku-ku, Tokyo 160-0022 Japan

TEL: +81-3-5312-5360

**Kansai Sales Office:** 949-2 Ebisucho Fushimi-ku, Kyoto 612-8201 Japan

TEL: +81-75-605-7311

**Kyosemi Opto America Corp:** 4655 Old Ironsides Suite 230 Santa Clara, California 95054 USA

TEL: +1-408-492-9361

**Eniwa Operation:** 385-31 Toiso Eniwa-shi, Hokkaido 061-1405 Japan

TEL: +81-123-34-3111

**Kamisunagawa Operation:** 70-1 Kamisunagawa Kamisunagawa-cho Sorachi-gun, Hokkaido 073-0200 Japan

TEL: +81-125-62-3611