


保险丝在汽车中的应用




商用空调回路上的应用

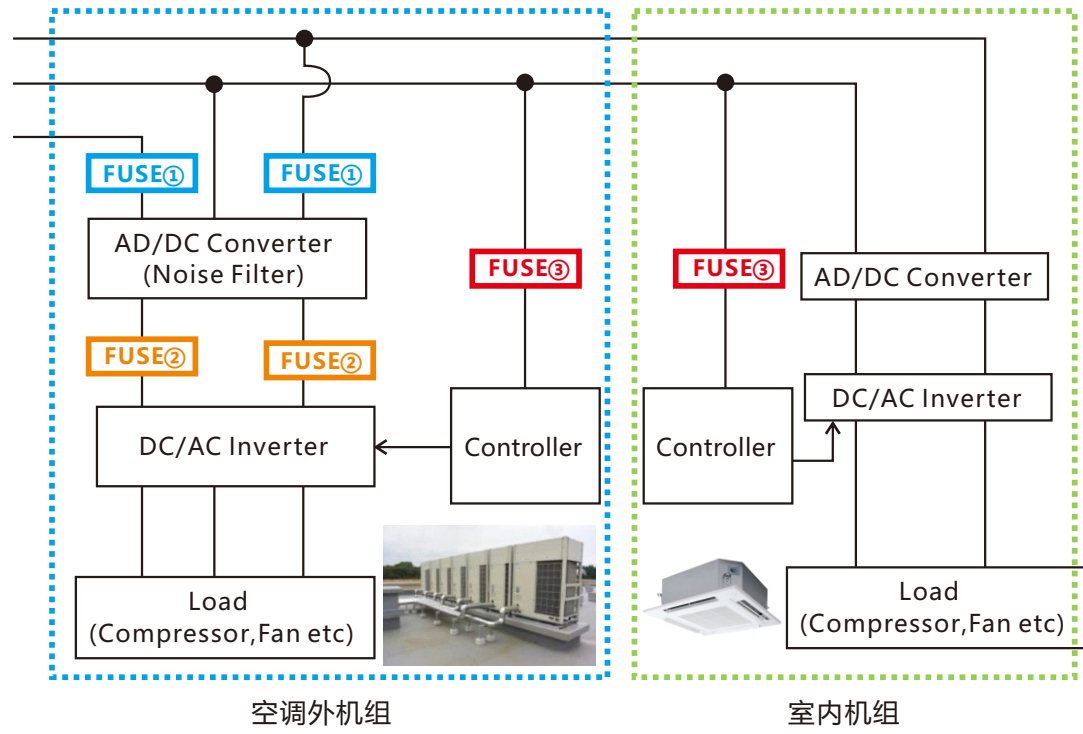

FUSE① AC/DC 转换器（噪音过滤器）

HC
尺寸: φ6.35x31.8mm
额定电压: AC250V
额定电流: 30A
安全认证: UL,PSE



VA101 系列
尺寸: φ10.3x39mm
额定电压: AC500V(40A)
AC250V(70A)
额定电流: 40A,70A
安全认证: UL




GAC 系列
尺寸: φ10.5x39mm
额定电压: AC500V(25~40A)
AC250V(50~80A)
额定电流: 25~80A
安全认证: UL,PSE



LAC 系列

尺寸: φ14.3x39mm
额定电压: AC600V(40,63A)
AC250V(100~125A)
额定电流: 40,63,100,125A
安全认证: UL,PSE




UAC

尺寸: φ20.9x41mm
额定电压: AC250V
额定电流: 200A
安全认证: UL,PSE



FUSE② DC/AC 逆变器

D51 系列
尺寸: φ5.2x20mm
额定电压: DC450V(1~10A)
额定电流: 1~10A
安全认证: UL



MF66NM 系列
尺寸: φ6.35x31.8mm
额定电压: DC650V(1~8A)
DC450V(10~30A)
额定电流: 1~30A
安全认证: UL




FUSE③ 控制器

KMS 系列
尺寸: 3.2x1.6x0.7mm (SMD 型)
额定电压: DC76V
额定电流: 1.6~15A
安全认证: UL



LM 系列 (黑色/透明色)
尺寸: 10x4x8mm
额定电压: DC48V
额定电流: 0.3~6.3A
安全认证: UL,TUV



轨道交通应用

售票机



P4系列+底座


屏蔽门



MP系列+底座

管状保险丝

风扇单元




MP系列+底座

摇动制动器




DM系列

地铁闸机



MP系列+底座

主控器



P4系列+底座

车门



BDH系列

速度计



DM系列

产品列表

系列名称	图片	尺寸	额定电压	额定电流	熔断电流	标准认证
KMS fuse		3.2x1.6x0.7mm	DC76V	1.6~15A	50A	UL
CRA fuse		6.35x20mm	AC250V	10~35.5A	500A	UL
RD fuse		12.5x7.5x8.5mm	DC76V	5~20A	500A	UL
BE-P fuse		9x4x8mm	AC/DC125V	1.6~5A	50A	UL
MF66NM/67NM fuse		φ6.35x31.8mm	DC650V	1~8A	150A	UL
D51/D52 fuse		φ5.2x20mm	DC450V	10~30A	400A	UL
D61/D62 fuse		φ6.35x20mm	DC450V	1~10A	400A	UL
HDGAC fuse		φ10.5x39mm	DC1000V	16A	500A	UL
FCRA fuse		φ6.7x20mm	DC450V	1~10A	500A	UL
GAE fuse		φ10.5x32mm	AC300V	56A	1,500A	UL
VD61 fuse		φ6.35x31.8mm Bolt-fixing type	DC450V	1A,30A	2,000A	UL (30A only)
HRP fuse		18x69.1x11mm	DC120V	175A	2,000A	
DH fuse		φ6.35x25mm	DC550V	31.5A	1,000A	UL
DGAE fuse		φ10.5x32.1mm	DC550V	40A	1,000A	UL

* Please feel free to contact us for more detailed information about the variation of the rated currents and the terminal shapes of tubular fuses.
* Refer overtest for application examples. *The specifications for development items are subject to change without prior notice.